






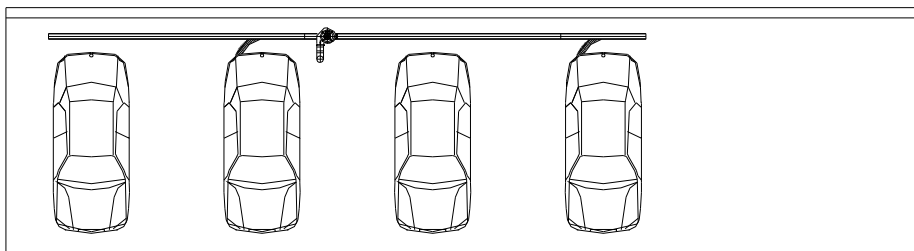



We care about you !

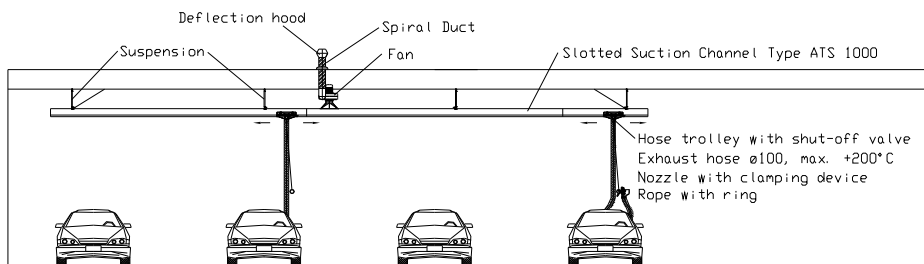





Exhaust Extraction Systems for CARS



















Part No.	Description	Price	Photo
000-001	Slotted Suction Channel Type ATS 1000 Section 175cm ² , made of Aluminium, Standard Length: 6m Weight: ~12kg/m. Slotted Channel Includes: Stainless Steel Spring Clamps, Neoprene Sealing Lips Temp. resistant up to +200°C		
010-001	Duct Connector Type ATS 1000 zinc coated steel		
110-011	Duct Connection Plate stabilized the duct connection		
010-005	End Cover Type ATS 1000 made of Aluminium		
010-003	Limit Stop Type ATS 1000 1 Set = 4 Pcs		
022-125 022-160	Air Duct Connection Front Type SSR1 Ø 125mm Ø 160mm		
0201-160	Air Duct Connection Front Type SSV1 cast aluminium for directly flanging of the fan Ø 160mm		
120-160 120-200	Air Duct Connection Top Type OOR1 zinc coated steel Ø 160mm Ø 200mm		
1201-160	Air Duct Connection Top Type OOV1 cast aluminium for directly flanging of the fan Ø 160mm		
110-002	Bracket zinc-plated steel, for fixing the suspension on the channel		
010-002	Ceiling Suspension zinc-plated steel, for fixing the channel directly to the ceiling		
130-050 130-100 130-200	Slotted Duct Suspension V-shape (without bracket and fixing angle) 1 Set = 2 Pipes up to = 500mm up to = 1000mm up to = 2000mm		










Part No.	Description	Price	Photo
131-050 131-100 131-200	Longitudinal Stiffener to stabilize the duct suspension up to = 500mm up to = 1000mm up to = 2000mm		
131-017 131-018	Mounting Profile galvanized steel, completely with mounting clamps for I-beams Length = 300mm Length = 500mm		
132-600 132-000	Wall Bracket galvanized steel, to suspension of the channel Length = 600mm Length = 1000mm		
040-075 040-100 041-075 041-100	Hose Trolley Type ATS 1000 Six Ball-Bearing Nylon Wheels and four Guiding Wheels. Cast aluminium with stainless steel sliding plates. <u>without shut-off valve</u> Hose connection Ø 75mm Hose connection Ø 100mm <u>with shut-off valve</u> Hose connection Ø 75mm Hose conenction Ø 100mm		
153-025	Spring Balancer Type ATS 1000 with ratchet and accessories Rope length: 3,0m Retracting force: 6 - 8kg		
1410-100 1410-125 1410-150	Swivel Connector for Exhaust Gas Hose zinc coated steel Ø100mm Ø125mm Ø150mm		











Part No.	Description	Price	Photo
<p>Exhaust Gas Hose Type TR High-quality exhaust gas hose made of TPE coated polyester fabric with outside nylon helix covered by an extremely wear-resistant scuff strip. Temperature rated up to 200°C, and resistant to all exhaust gases, fuels and oils. Super Lightweight and highly flexible.</p> <p>964-075 Ø 75mm price / m 964-100 Ø 100mm price / m 964-125 Ø 125mm price / m 964-150 Ø 150mm price / m</p> <p>Delivery in any desired length up to 15m</p>			
<p>Exhaust Gas Hose Type HT-300 High-quality, specially coated, high temperature fabric wall with external helix made of stainless steel. Temperature rated up to 300°C, flame resistant, resistant to all exhaust gases and oil, highly flexible.</p> <p>972-100 Ø 100mm price / m 972-125 Ø 125mm price / m 972-150 Ø 150mm price / m</p> <p>Delivery in any desired length up to 15m</p>			
<p>Exhaust Gas Hose Type HT-500 Double-layered construction High-quality, specially coated, high temperature fabric wall with external helix made of stainless steel. Temperature rated up to 500°C, flame resistant, resistant to all exhaust gases and oil, highly flexible.</p> <p>981-100 Ø 100mm price / m 981-125 Ø 125mm price / m 981-150 Ø 150mm price / m</p> <p>Delivery in any desired length up to 15m</p>			
<p>Exhaust Gas Hose Type HT-800 Double-layered construction High-quality, specially coated, high temperature fabric wall with external helix made of stainless steel. Temperature rated up to 800°C, flame resistant, resistant to all exhaust gases and oil, highly flexible.</p> <p>984-100 Ø 100mm price / m 984-125 Ø 125mm price / m 984-150 Ø 150mm price / m</p> <p>Delivery in any desired length up to 15m</p>			









Part No.	Description	Price	Photo
<p>936-075 936-100</p>	<p>Exhaust Gas Nozzle with Clamping Device for Cars Neoprene body with opening for testing device. Hose connection bent upwards 60°. Nozzle comes with protection grid.</p> <p>Intake opening: 155 x 85mm for Hose Ø75mm for Hose Ø100mm</p>		
<p>935-100 935-125 935-150</p>	<p>Exhaust Gas Nozzle with Clamping Device for Cars Neoprene body with opening for testing device. Hose connection bent upwards 60°. Nozzle comes with protection grid.</p> <p>Intake opening: 220 x 120mm for Hose Ø100mm for Hose Ø125mm for Hose Ø150mm</p>		
<p>934-100 934-125 934-150</p>	<p>Exhaust Gas Nozzle with Clamping Device for Cars Neoprene body with opening for testing device. Nozzle comes with protection grid.</p> <p>Intake opening: Ø170mm for Hose Ø100mm for Hose Ø125mm for Hose Ø150mm</p>		
<p>932-100 932-125 932-150</p>	<p>Exhaust Gas Nozzle with Clamping Device for Cars Made of Aluminium. Nozzle comes with protection grid.</p> <p>for Hose Ø100mm for Hose Ø125mm for Hose Ø150mm</p>		
<p>938-9010 938-9012 938-9015</p>	<p>Exhaust Gas Nozzle for Porsche, AMG Made of Stainless Steel and Specialclamp</p> <p>Intake opening: 290 x 180mm for Hose Ø100mm for Hose Ø125mm for Hose Ø150mm</p>		
<p>930-065 930-075 930-100</p>	<p>Conical Nozzle for Single Pipe Neoprene body with opening for testing</p> <p>for Hose Ø65mm for Hose Ø75mm for Hose Ø100mm</p>		

Part No.	Description	Price	Photo
921-065 921-075 921-100	Conical Nozzle for Single Pipe Neoprene body with opening for testing Intake opening: 110 x 70mm for Hose Ø65mm for Hose Ø75mm for Hose Ø100mm		
1100-150E	Exhaust Gas Funnel on Stand Made of Stainless Steel, with stand. Adjustable 100 up to 500mm. Intake opening: 300 x 200mm for Hose Ø150mm		
1110-100 1110-125 1110-150	Exhaust Gas Funnel on Stand Made of zinc-coated steel sheet, with stand. Adjustable 100 up to 500mm. for Hose Ø100mm for Hose Ø125mm for Hose Ø150mm		
907-100	Exhaust Adapter for Twin Tail Pipe Consist of: Y-connector Ø100mm, made of aluminium 2 Exhaust hose Ø100mm , Length = 1m 2 Exhaust Gas Nozzle (Type 936-100) The unit will be completely mounted delivered.		
900-100	Exhaust Adapter for Twin Tail Pipe Y-connector made of Aluminium In-/Outlet: 100 / 100 / 100mm		
900-101	Exhaust Adapter for Twin Tail Pipe Y-connector made of Aluminium In-/Outlet: 100 / 100 / 100mm for use with quick connector		
1100-154	Exhaust Adapter for Nozzle Type 934-... for Exhaust Gas Funnel Type 1100-150E for Exhaust Gas Funnel Type 1110-150		
1100-156	Exhaust Adapter for Nozzle Type 935-... for Exhaust Gas Funnel Type 1100-150E for Exhaust Gas Funnel Type 1110-150		
1100-155	Exhaust Adapter for Nozzle Type 936-... for Exhaust Gas Funnel Type 1100-150E for Exhaust Gas Funnel Type 1110-150		

Part No.	Description	Price	Photo
955-075 955-100 955-125 955-150	Hose Suspension Sleeve for Hose Ø75mm for Hose Ø100mm for Hose Ø125mm for Hose Ø150mm		
156-075 156-100 156-125 156-150	Hose Clamp for Hose Ø75mm for Hose Ø100mm for Hose Ø125mm for Hose Ø150mm		
158-100 158-125 158-150	Rubber Sleeve protects surfaces against scratches for Hose Ø100mm for Hose Ø125mm for Hose Ø150mm		
957-100 957-125 957-150	"Female" Hose Quick Connector Type W with 2 spring loaded clamping devices for Hose Ø100mm for Hose Ø125mm for Hose Ø150mm		
957-101 957-126 957-151	"Male" Hose Quick Connector Type M for Hose Ø100mm for Hose Ø125mm for Hose Ø150mm		
902-100 902-125 902-150	Wall Mounted Hose Support for Hose Ø100mm for Hose Ø125mm for Hose Ø150mm		
945-075 945-100 945-125 945-150	Hose Connecting Support for Hose Ø75mm for Hose Ø100mm for Hose Ø125mm for Hose Ø150mm		
155-010	Rope with Ring for suspension of the exhaust gas nozzle when not in use and operation of the hose trolley valve. Standard length: 3m		

Part No.	Description	Price	Photo
810-012	Fan Type ATS 12 Cast Aluminium Pressure Blower max. 1740m ³ /h, max. 1400Pa 0,85kW - 1,9A - IP54 Weight: 23,5kg Sound level: 79 dB(A) 3~ 400V 50Hz		
852-160	Outlet Connector Ø160mm		
854-160	Intake Connector Ø160mm		
863-160	Flexible Connection (Pair) Ø160mm		
864-002	Vibration Absorbers (4 Pcs)		
855-033	Fan Bracket - Wall Type		
870-030	Motor Protection Switch 1,6 - 2,4A		
810-016	Fan Type ATS 16 Cast Aluminium Pressure Blower max. 2220m ³ /h, max. 1600Pa 1,2kW - 2,65A - IP54 Weight: 24,5kg Sound level: 86 dB(A) 3~ 400V 50Hz		
852-160	Outlet Connector Ø160mm		
854-160	Intake Connector Ø160mm		
863-160	Flexible Connection (pair) Ø160mm		
864-002	Vibration Absorbers (4 Pcs)		
855-038	Fan Bracket - Wall Type		
870-040	Motor Protection Switch 2,4 - 4,0A		

Part No.	Description	Price	Photo
810-031	Fan Type ATS 31 Cast Aluminium Pressure Blower max. 3120m³/h, max. 2300Pa 2,4kW - 4,55A - IP54 Weight: 47,0kg Sound level: 85 dB(A) 3~ 400V 50Hz		
852-200	Outlet Connector Ø200mm		
854-200	Intake Connector Ø200mm		
863-200	Flexible Connection (Pair) Ø200mm		
864-002	Vibration Absorbers (4 Pcs)		
855-090	Fan Bracket - Wall Type		
870-050	Motor Protection Switch 4,0 - 6,0A		
810-041	Fan Type ATS 41 Cast Aluminium Pressure Blower max. 4200m³/h, max. 2700Pa 3,8kW - 7,7A - IP54 Weight: 49,0kg Sound level: 89 dB(A) 3~ 400V 50Hz		
852-200	Outlet Connector Ø200mm		
854-250	Intake Connector Ø250mm		
863-250	Flexible Connection (Pair) 1Pc Ø200mm / 1Pc Ø250mm		
864-002	Vibration Absorbers (4 Pcs)		
855-090	Fan Bracket - Wall Type		
870-060	Motor Protection Switch 6,0 - 10,0A		

Part No.	Description	Price	Photo
890-080 890-100	<p>Sound Absorbing Cabinet Zinc coated steel frame construction with soundproof wall panels and inspection door.</p> <p>Sound damping ~ 15-18 dB(A) Type WN 80 (for fan type ATS 12 and 16) Dimension: 700 x 700 x 700mm Type WN 100 (for fan type ATS 31 and 41) Dimension: 920 x 920 x 920mm</p>		
870-700	Safety Switch		
890-081	<p>Wall Bracket f. Sound Absorbing Cabinet galvanized steel profile for Type WN 80 / 100</p>		
891-125 891-160 891-200	<p>Sound Absorber Length = 900mm Ø125mm Ø160mm Ø200mm</p>		
893-125 893-160 893-200	<p>Deflection Hood with rain water outlet and protective grid Ø125mm Ø160mm Ø200mm</p>		
894-125 894-160 894-200	<p>Horizontal Outlet zinc coated steel with protective grid Ø125mm Ø160mm Ø200mm</p>		
895-125 895-160 895-200	<p>Roof Penetration zinc coated steel, for flat roof type For customized design 25% extra charge. Ø125mm Ø160mm Ø200mm</p>		
896-125 896-160 896-200	<p>Wall Penetration zinc coated steel Ø125mm Ø160mm Ø200mm</p>		
1021-100 1021-125 1021-160 1021-200	<p>Spiral Duct DIN 24145 zinc coated steel Delivery length: 3m Ø100mm price / m Ø125mm price / m Ø160mm price / m Ø200mm price / m</p>		

Part No.	Description	Price	Photo
1022-100 1022-125 1022-160 1022-200	Duct Bend 90° Ø100mm Ø125mm Ø160mm Ø200mm		
1023-100 1023-125 1023-160 1023-200	Duct Bend 45° Ø100mm Ø125mm Ø160mm Ø200mm		
1024-100 1024-125 1024-160 1024-200	T-Piece 90° for Duct Ø100mm Ø125mm Ø160mm Ø200mm		
1025-125 1025-158 1025-159 1025-160 1025-200 1025-250	Reducing Joint Ø125 - 100mm Ø160 - 100mm Ø160 - 125mm Ø160 - 150mm Ø200 - 160mm Ø250 - 200mm		
1027-100 1027-125 1027-160 1027-200	Duct Damper manual operated Ø100mm Ø125mm Ø160mm Ø200mm		
1027-101 1027-126 1027-161 1027-201	Shut-Off Valve with rope and ring Ø100mm Ø125mm Ø160mm Ø200mm		
1028-100 1028-125 1028-160 1028-200	Connector for Spiral Duct Ø100mm Ø125mm Ø160mm Ø200mm		
1029-100 1029-125 1029-160 1029-200	Connector for Pipe Fittings Ø100mm Ø125mm Ø160mm Ø200mm		
1032-100 1032-125 1032-160 1032-200	Mounting Bracket Ø100mm Ø125mm Ø160mm Ø200mm		
1026-000	Sealing Tape, self adhesive Length: 20m, Width 50mm		


We care about you !



China

Russia

Germany

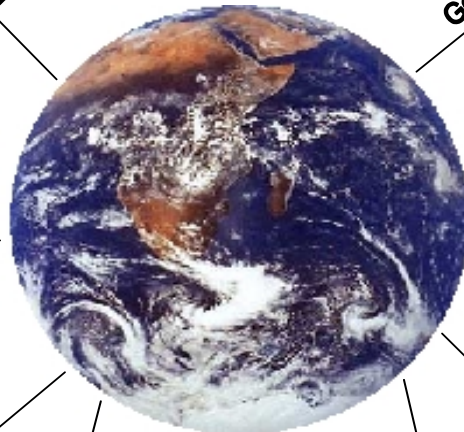

Austria

India



Switzerland

USA

Belgium



Australia

Spain



We care about you !

